


Phantom Door Design Specifications

(External Assembled View)

For Illustration Purposes Only - Not Drawn to Scale

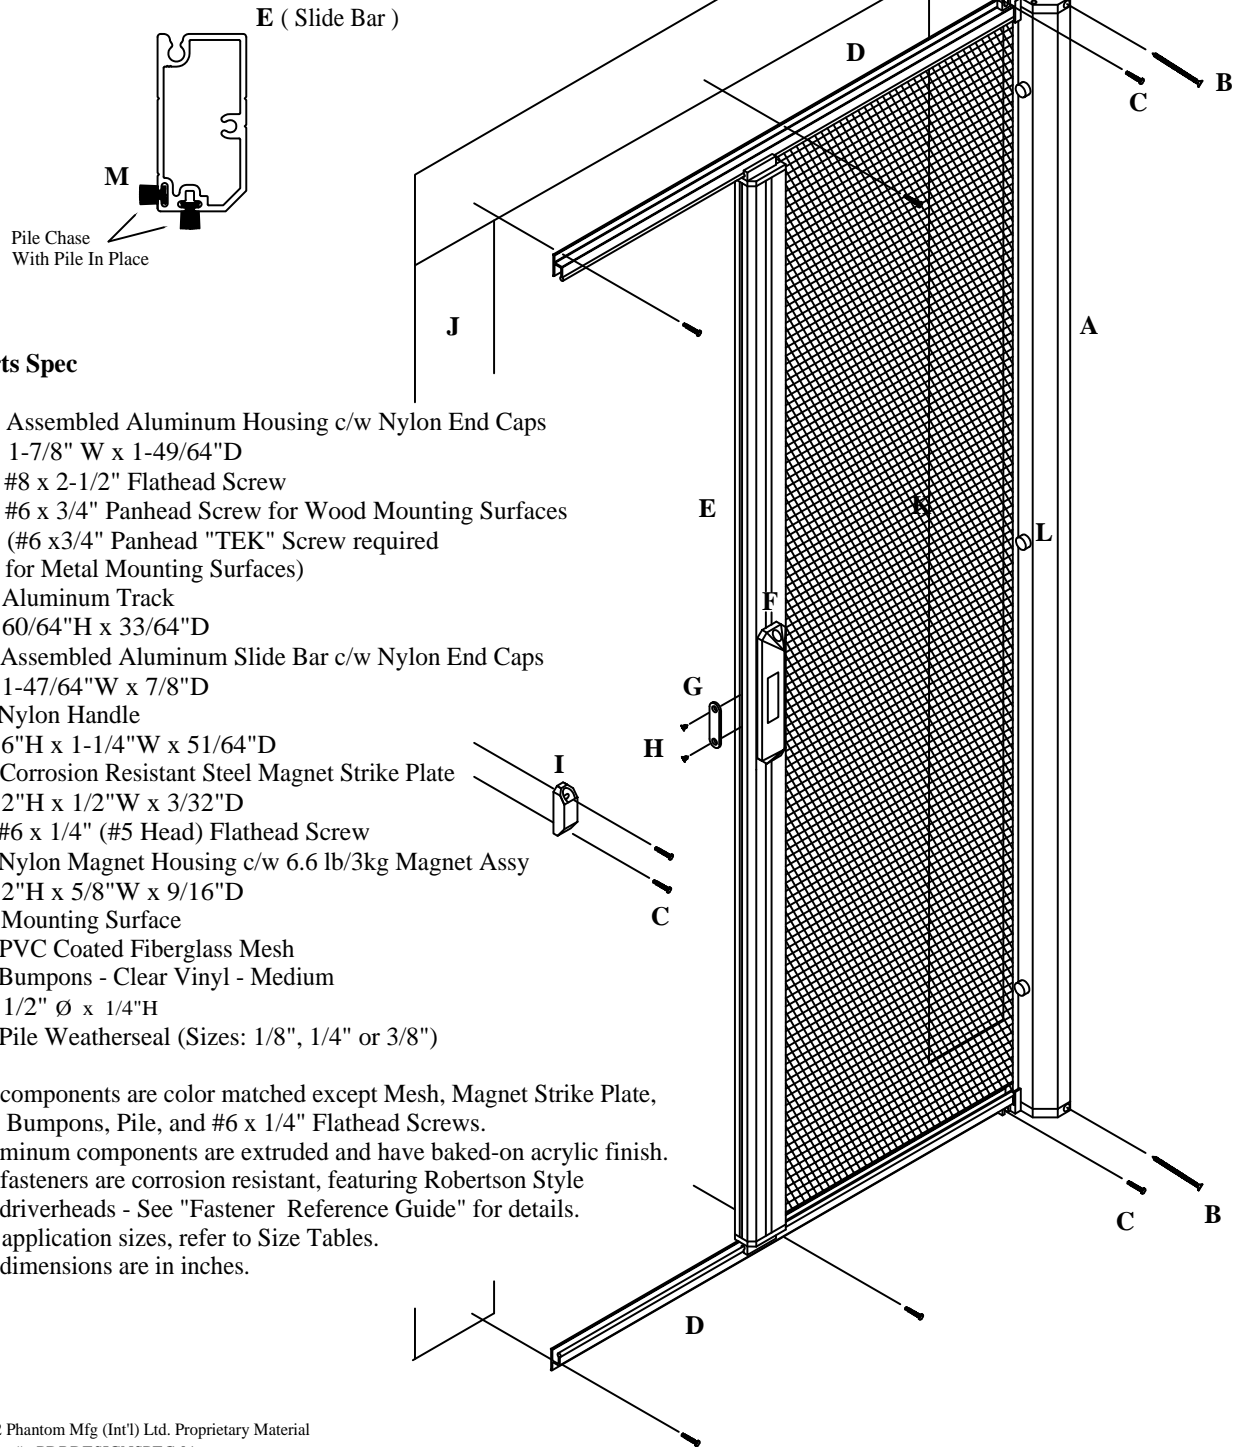

Parts Spec

- A** Assembled Aluminum Housing c/w Nylon End Caps
1-7/8" W x 1-49/64"D
- B** #8 x 2-1/2" Flathead Screw
- C** #6 x 3/4" Panhead Screw for Wood Mounting Surfaces
(#6 x 3/4" Panhead "TEK" Screw required
for Metal Mounting Surfaces)
- D** Aluminum Track
60/64"H x 33/64"D
- E** Assembled Aluminum Slide Bar c/w Nylon End Caps
1-47/64"W x 7/8"D
- F** Nylon Handle
6"H x 1-1/4"W x 51/64"D
- G** Corrosion Resistant Steel Magnet Strike Plate
2"H x 1/2"W x 3/32"D
- H** #6 x 1/4" (#5 Head) Flathead Screw
- I** Nylon Magnet Housing c/w 6.6 lb/3kg Magnet Assy
2"H x 5/8"W x 9/16"D
- J** Mounting Surface
- K** PVC Coated Fiberglass Mesh
- L** Bumpons - Clear Vinyl - Medium
1/2" Ø x 1/4"H
- M** Pile Weatherseal (Sizes: 1/8", 1/4" or 3/8")

All components are color matched except Mesh, Magnet Strike Plate, Bumpons, Pile, and #6 x 1/4" Flathead Screws.
Aluminum components are extruded and have baked-on acrylic finish.
All fasteners are corrosion resistant, featuring Robertson Style driverheads - See "Fastener Reference Guide" for details.
For application sizes, refer to Size Tables.
All dimensions are in inches.