

Executive Design Specifications - System with new Recessed Side Track (V2)

(Exploded View)

For Illustration Purposes Only - Not Drawn to Scale



Parts Spec

- A Roller Assembly (3-1/4" / 4" / 5") c/w Inserts (L & R)
- B Roller Mounting Angle (L & R)
(2 x 4 x 1/8", 2 x 5 x 1/4" or 2 x 7 x 1/4" - all 3-1/4" Wide)
- C Motor Bracket (Riveted to Roller Mounting Angle)
- D Idler Bearing (Riveted to Roller Mounting Angle)
- E Electric Motor
(c/w Motor Securing Clips)
- F Spring Idler
- G Motor Adjustment Key
- H Motor Crown (Gear)

- I PVC Coated Fiberglass Mesh or other - see Mesh Specifications
- J Slide Bar
- K Bottom Seal
- L Zipper (Around All Sides)
- M Recessed Side Track Assembly
- N Probe Assembly
- O #8 x 1" Panhead "TEK" Screw
- P #6 x 1/2" Panhead "TEK" Securing Screws (Tab to Probe)
- Q #6 x 1/2" Panhead "TEK" Securing Screws (For Shipping)

It is imperative that the leg of the Recessed Side Track shown, be to the back of the Recessed Side Track Housing during assembly

RECESSED SIDE TRACK INSTALLATION NOTE

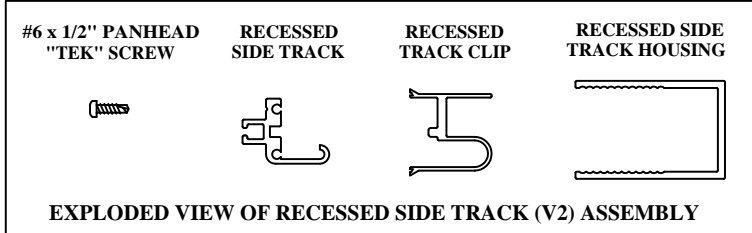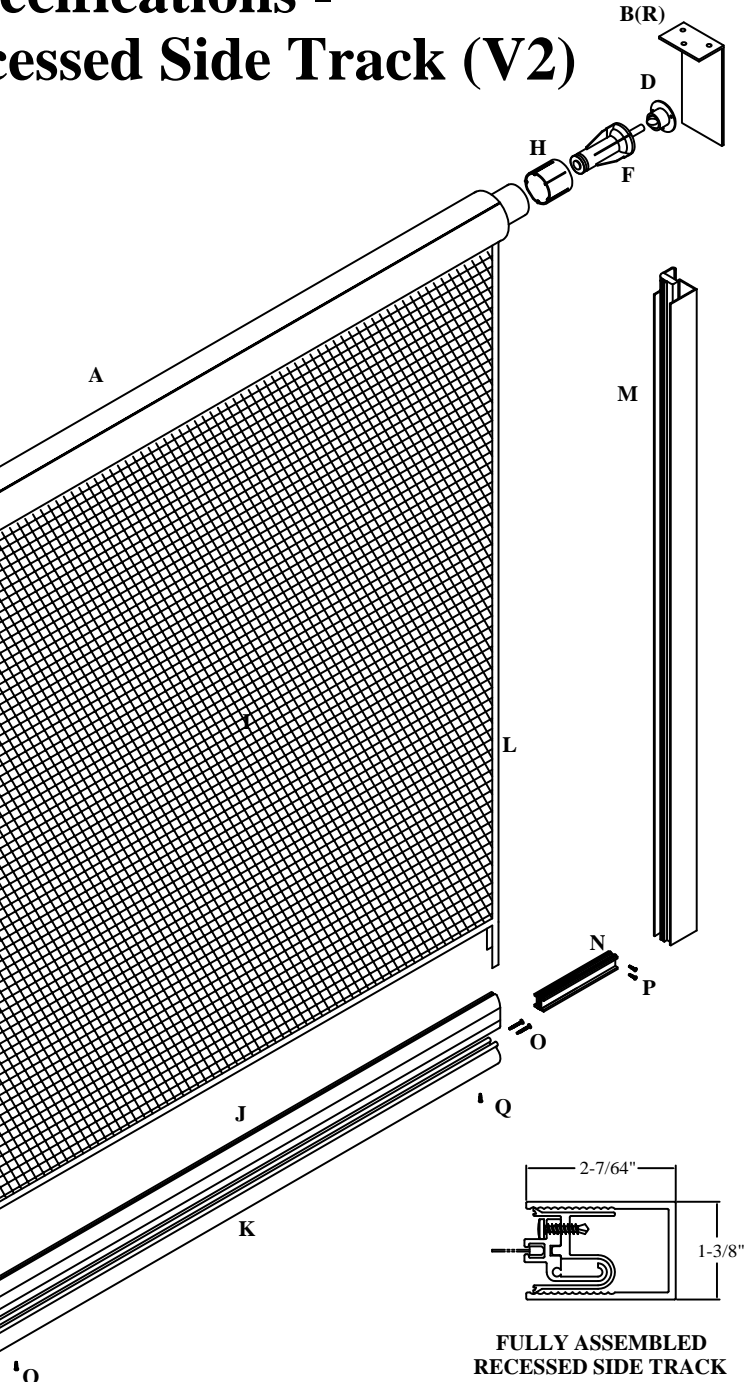

RECESSED TRACK CLIP IS 3" LONG AND PLACED EVERY 2"